


Terminal Antenna

- Technology: 4G LTE
- Ready-to-use
- Easy to install, with simple screw-on, articulated right-angle,
- SMA(M) connector, fully customized
- Applications in cellular terminal stand, networking equipment, broadband modems, CPE and router etc.



Item	Performance Specifications
Center Frequency	824~960MHz; 1710~2690MHz
V.S.W. R	≤1.5; ≤1.5
Peak Gain	5dBi; 5dBi
Impedance	50Ohm
Cable Type	RG178, fully customized
Connector Type	SMA Male, fully customized
Operation Temperature	-40°C~+65°C
Storage Temperature	-40°C~+80°C

S Parameter

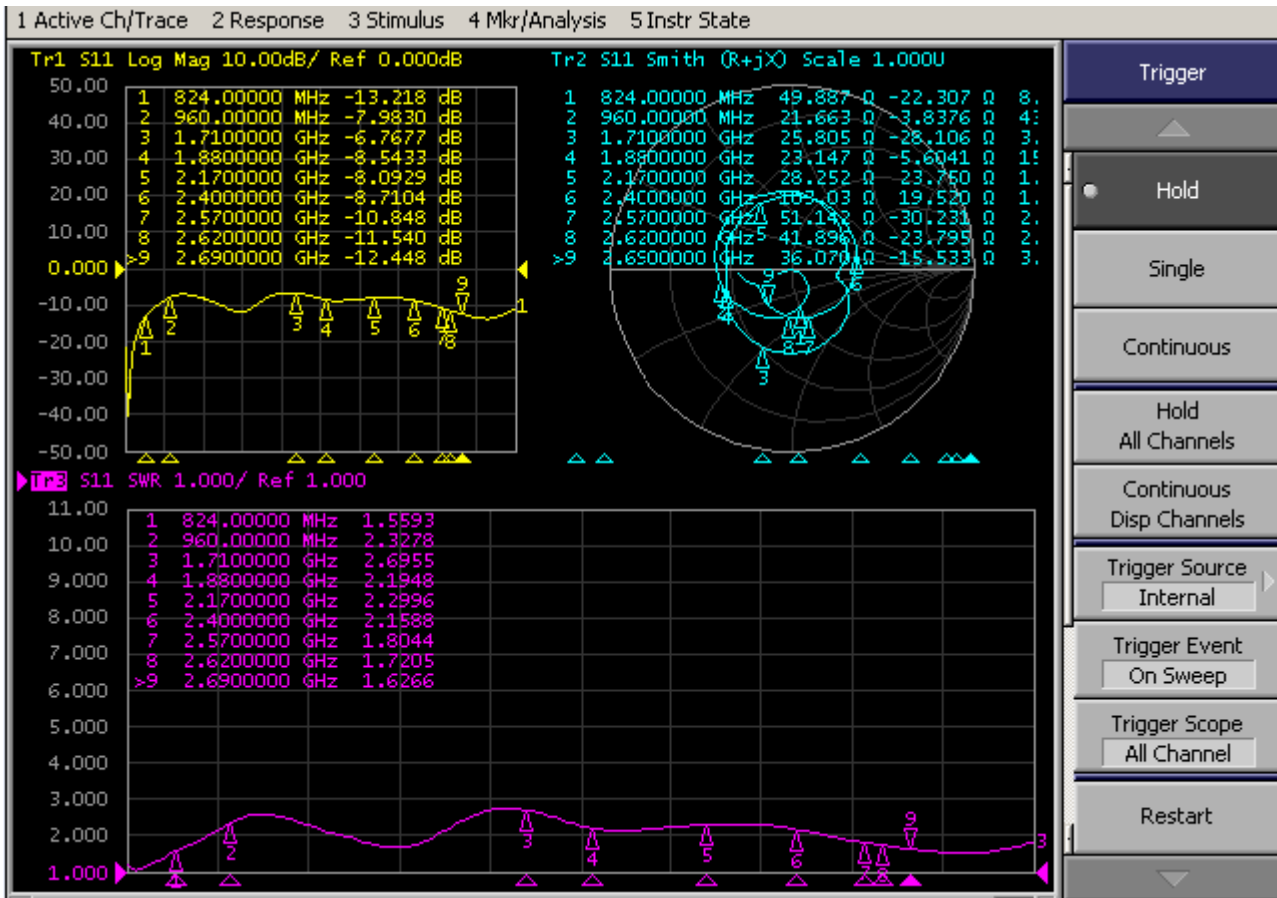

Antenna Mechanical Drawing

